


FACTORY ASSEMBLED INSULATED ROOFLIGHT ORDER FORM

SUSPENDED & SPLIT BOX UNITS

FILON[®]

ON YOUR SIDE

Customer Name		Order Number	
Order Date		Date Required	
Delivery Address	Comments / Special Instructions / Markings		
Site Contact	Profile		
Mk2 Units - Overlap Both Sides	Box Depth		
	Qty:		

Fire Performance			
Outer Sheet	Tick	Liner	Tick
Grade 300 *standard specification	☐	Grade 104 *standard specification	☐
Grade 104	☐	Grade 101	☐
Grade 101	☐		☐

Notes	
- Maximum FAIR unit length is 8.5m. - Suspended & split box FAIR units come with 25mm wide filler blocks as standard. - Suspended & split box FAIR units fitted in a metal roof require a minimum outer sheet weight of CE30E. - Film core is not suitable for suspended box FAIRs.	- Shallow depth FAIRs may not be suitable for all U-Value options. - Please refer to TIS104 for more information.

Outer Sheet Weight	Expected Non-Fragility Period	Support Centres	Tick
CE24E	When New	Up to 2m	☐
CE30E	25 Years	Up to 2m	☐
CEDR24E	25 Years	Up to 2m	☐
CE36E	25 Years	Up to 2.25m	☐
CEDR30E	25 Years	Up to 2.25m	☐
SUPASAFE	30 Years	Up to 2.5m	☐


U-Value	Tick
Double Skin - 3.22 W/(m ² K) - Not part L compliant	☐
4mm Polycarbonate - 1.71 W/(m ² K)	☐
10mm Polycarbonate - 1.37 W/(m ² K)	☐
2 x 4mm Polycarbonate (Spaced) - 1.17 W/(m ² K)	☐
4mm & 10mm Polycarbonate (Spaced) - 1.00 W/(m ² K)	☐
2 x 10mm Polycarbonate - 0.87 W/(m ² K)	☐

FACTORY ASSEMBLED INSULATED ROOFLIGHT ORDER FORM

SUSPENDED & SPLIT BOX UNITS

FILON[®]

ON YOUR SIDE

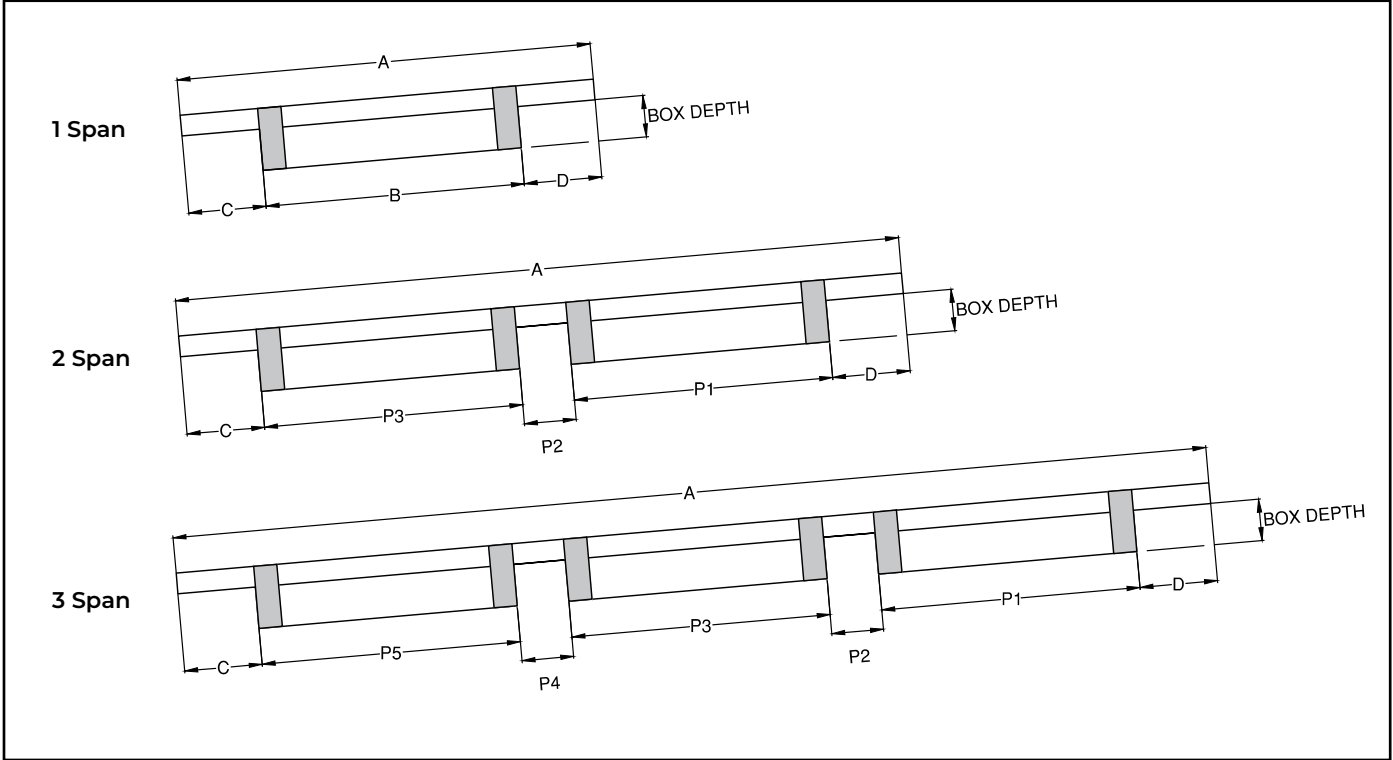

*All Dimensions in mm. Press tab, filling form in order, to auto-calculate.

Filler Position Dimensions				
P1:	P2:	P3:	P4:	P5:
Dimension A: (Top Sheet Length) 0		Dimension B: (Liner Length)		Dimension C: (Downslope Cutback)
				Dimension D: (Upslope Cutback)

FILON[®]

FILON[®] Products Limited
 Unit 3 Ring Road, Zone 2, Burntwood Business Park,
 Burntwood, Staffordshire, England WS7 3JQ
 Tel: +44 (0)1543 687300 Email: sales@filon.co.uk

WWW.FILON.CO.UK

©FILON Products Ltd own the copyright of this document which is supplied in confidence and which must not be used for any other purpose than that which it is supplied. It must not be reproduced without permission from the Company.
 R3-07A Issue 5 03/2026